


Stock #:
Mr. Heater #

Description/Usage:

Application(s):

F273863

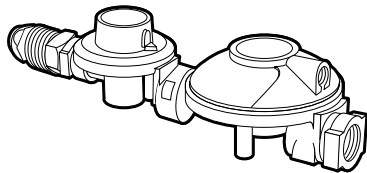


Propane Two-Stage Regulator

Excess Flow Soft Nose P.O.L.
(Inlet) x 3/8" Female Pipe
Thread (Outlet)

Features:

- Two-stage regulator results in a more consistent inlet pressure between the first and second stage. This allows for a more consistent flow of gas to the appliance.
- 160,000 BTU Capacity
- Outlet pressure set at 11" W.C.
- Operating Temperature:
-20°C - 50°C

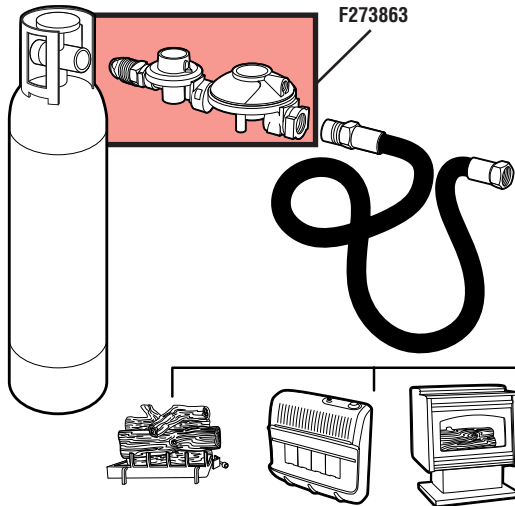

THE ORIGINAL
Mr. Heater[®]

Propane Regulators