

TUF-TUG ROPE BLOCK & TACKLE

- CAPACITIES:**
- PULL 700 LBS. (HORIZONTAL)
 - LIFT 350 LBS. (VERTICAL)
 - REACH 10 FT. STANDARD

CAUTIONS

- Read and understand all instructions, cautions and considerations before using.
- Failure to do so may result in personal injury.
- Inspect mechanism for proper operation before each use.
- Discontinue use of TUF-TUG's that are damaged, malfunctioning or not in good repair.
- Inspect condition of Rope and End Termination before each use.
- Know your loads. Do not exceed rated capacities.
- Do not use an extension bar on the lever lock.
- Never stand in front of or in line with a mechanism under load.
- Do not use to lift people.
- Do not use to lift loads overhead.
- Never leave a suspended load unattended.
- Always make certain that the load seats securely in the throat of the hook.
- Do not tip or side load hooks.
- Use only under manual power. Do not shock load mechanism.

- This product is only intended for straight-in-line lifting and pulling.
 - Do not side load mechanism.
 - Do not use your TUF-TUG as a tow line, external loads could damage the mechanism.
 - Do not use your TUF-TUG as a load binder or tie down.
 - Follow guidelines of the following "Rope Use Considerations".
- ROPE USE CONSIDERATIONS:**
- To Avoid Damaging Situations, please note the following:
- Use #3/8 Solid Braid Rope Only.
 - Do Not Subject Rope to Heat above 150 Degrees.
 - Do Not Expose Rope to extreme ultraviolet light for prolonged periods of time.
 - Do Not Use Rope in the presence of vapors, mists, sprays or liquids of acids, phenolics, ethers or bleaching agents.
 - Do not pull rope over sharp corners or secure hook back on to load line.
 - Do not use rope with excessive abrasions or worn fibers.
 - Do not use rope with melted, charred or burnt sections.
 - Do not use rope with knotted, punctured, cut or snagged sections.

Any part or mechanism that is recognized as defective by Ohio Hoist & Pulley will be repaired free of charge during the warranted period if it is returned, prepaid, to the factory with a copy of the sales receipt. Claims for labor, delays or damages are not covered by this warranty.


This warranty does not apply if the unit has been altered, modified, or repaired by any source other than Ohio Hoist & Pulley. Warranty is also invalid if the mechanism is subjected to uses or situations warned against in either the "Cautions Section" or "Use Considerations".

WARRANTY

"Limited 90 Day Warranty to Original Using Buyer"

All Tuf-Tug Hoist Pulleys are warranted for 90 days against defects when operated under normal conditions, within their rated capacities and in accordance with the operating instructions and use considerations.

TTRH-700 ROPE HOIST/BLOCK & TACKLE OPERATING INSTRUCTIONS

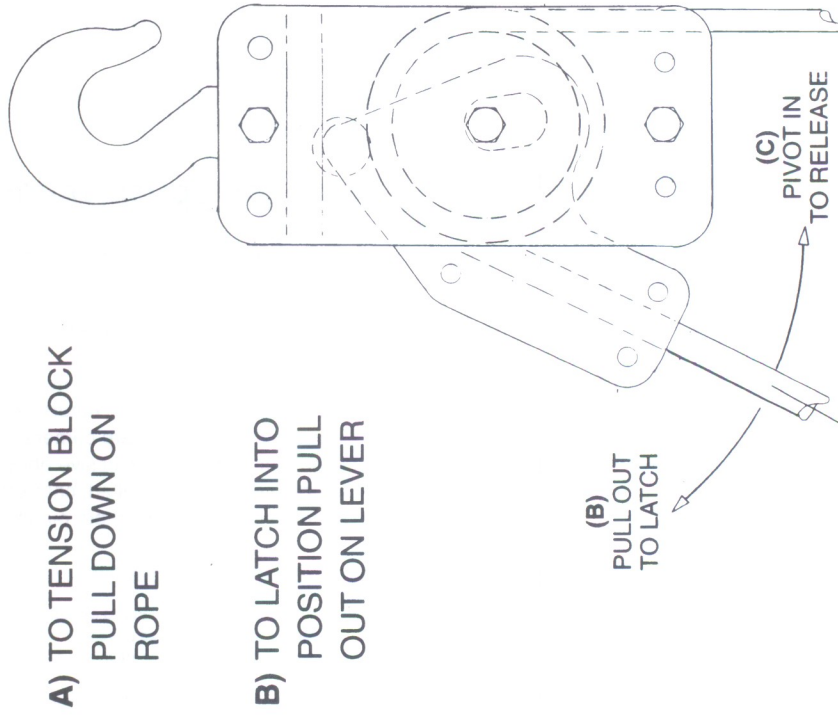

C) TO RELEASE TENSION
PULL DOWN ON
ROPE AND PIVOT
LEVER INWARD

