




- For use with low viscosity petroleum fluids such as Diesel & Kerosene
- Lightweight, compact design for farm or work applications
- Delivers up to 8GPM/30LPM
- Duty cycle: 30min.
- Equipped with
 - 13ft. (4m) delivery hose
 - 1pc Steel suction pipe
 - 1pc Aluminum manual nozzle
 - 2" tank adapter

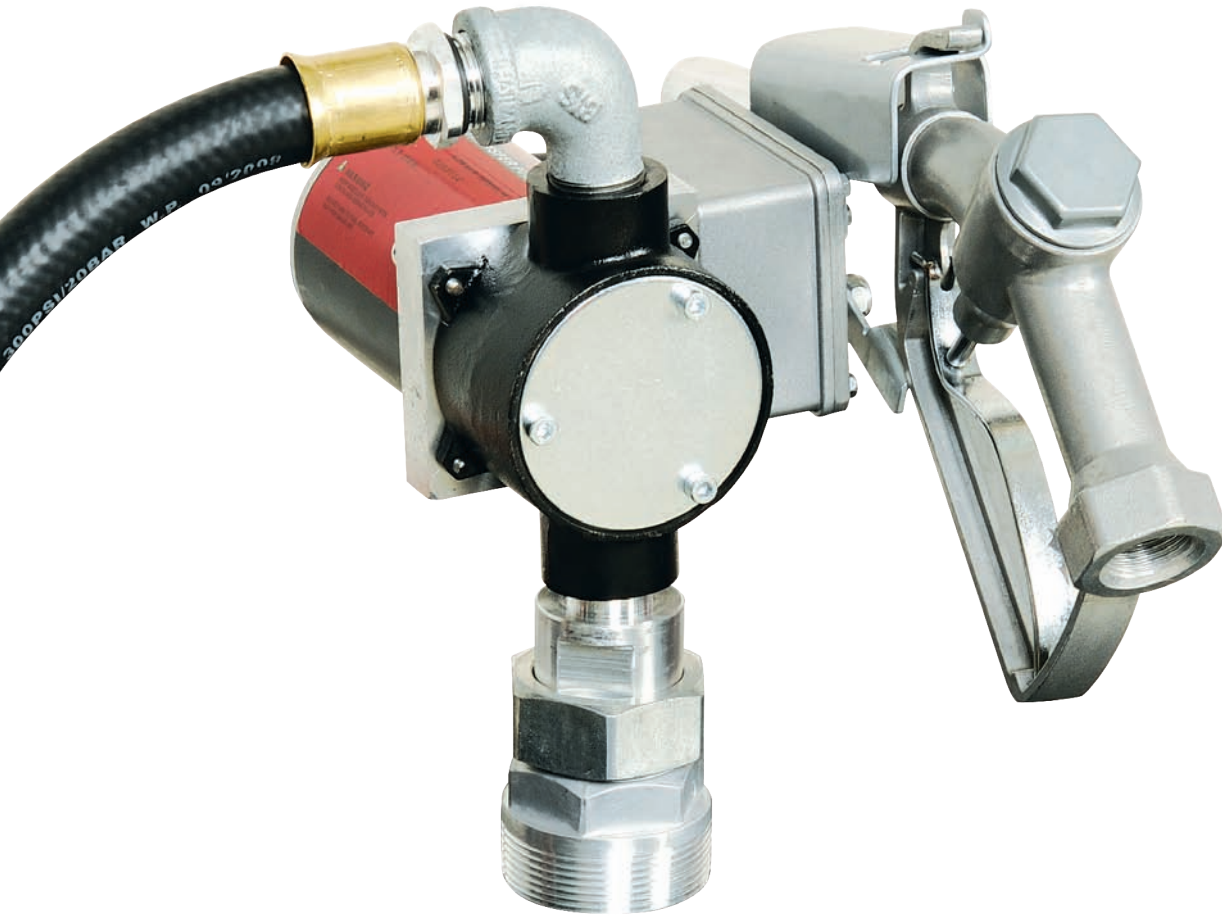

Item No.	Pump Rate	Voltage	Inlet	Outlet	Model of Nozzle	Package Dimension	Weight
1031938	8GPM / 30LPM	12V	3/4"	3/4"	18321001	35x35x20cm	8.5kgs