

REESE

INSTALLATION INSTRUCTIONS

Product No.

JEEP LIBERTY

37053

You *can* take it with you.

ELKHART, IN., OAKVILLE, ONT.

SMALL PARTS
PACKAGE 100000010

WARNING: DO NOT LUBRICATE THREADS, BOLT FAILURE MAY OCCUR DUE TO OVER TIGHTENING.
WARNING: DO NOT DRILL OR WELD TO THIS HITCH.

IMPORTANT NOTES
USE ONLY REESE SUPPLIED OR APPROVED BOLTS, LOCKNUTS, AND WASHERS TO INSTALL THIS HITCH

EXISTING WELDNUTS IN
VEHICLE FRAME 3 PER SIDE

VEHICLE FRAME RAIL

FUEL TANK SHIELD

TOOLS REQUIRED

9/16"	SOCKET
18MM	SOCKET
19MM	SOCKET
TORQUE WRENCH	

WITH FUEL TANK SHIELD

1/2" STRUCTURAL WASHER
1/2" LOCK WASHER
12MM 1.75 X 40MM HEX BOLT

HITCH
CENTER SECTION

FRAME
BRACKET

3/8" RIBBED NECK BOLT

3/8" LOCK WASHER

3/8" HEX NUT

1. IF VEHICLE IS EQUIPTED WITH A FUEL TANK SHIELD, REMOVE THREE (3) ON DRIVERS SIDE AND ATTACH FRAME BRACKET USING SUPPLIED 12MM BOLTS WITH 1/2" LOCK WASHERS AND 1/2" STRUCTURAL WASHERS INTO EXISTING WELD NUTS IN VEHICLE FRAME. REPEAT FOR PASSENGER SIDE, LEAVING HARDWARE LOOSE. DISCARD HARDWARE THAT WAS REMOVED.


(OVER)

For Installation Assistance or Technical Help, See our Web Site at
www.reeseprod.com or Call 1-219-266-3993

EXISTING WELDNUTS IN
VEHICLE FRAME 3 PER SIDE

VEHICLE FRAME RAIL

WITHOUT FUEL TANK SHIELD

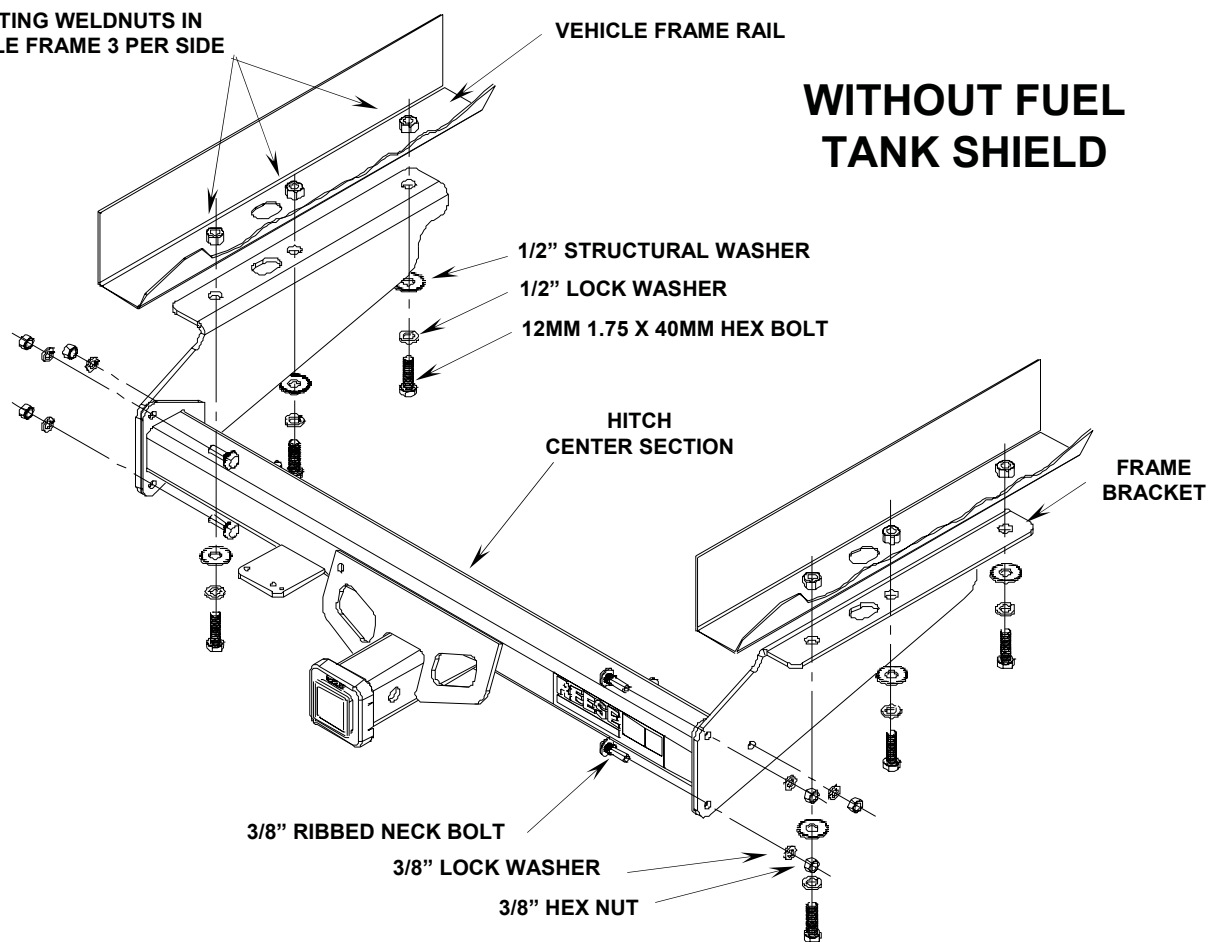

2. IF VEHICLE IS NOT EQUIPPED WITH A FUEL TANK SHIELD, ATTACH FRAME BRACKET TO DRIVERS SIDE USING SUPPLIED 12MM BOLTS WITH 1/2" LOCK WASHERS AND 1/2" STRUCTURAL WASHERS INTO EXISTING WELD NUTS IN VEHICLE FRAME. REPEAT FOR PASSENGER SIDE LEAVING HARDWARE LOOSE.
3. ATTACH HITCH CENTER SECTION TO FRAME BRACKETS USING SUPPLIED 3/8" RIBBEDNECK BOLTS THROUGH THE CENTER SECTION AND FRAME BRACKET, APPLY 3/8" LOCK WASHERS AND 3/8" HEX NUTS TO OUTSIDE OF FRAME BRACKETS.
4. TORQUE 12MM HARDWARE TO 70LB-FT AND 3/8" HARDWARE TO 35 LB-FT.

For Installation Assistance or Technical Help, See our Web Site at
www.reeseprod.com or Call 1-219-266-3993

THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATION AND REQUIREMENTS FOR THE STATE OF NEW YORK AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. WEIGHT DISTRIBUTING HITCH RATING IS 5000 LB. MAX. GROSS TRAILER WEIGHT AND 500 LB. MAX. TONGUE WEIGHT. WEIGHT CARRYING HITCH RATING IS 4000 LB MAX GROSS TRAILER WEIGHT AND 400 LB MAX TONGUE WEIGHT. CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS AND LIMITATIONS.

LIMITED WARRANTY

Reese warrants its Hitches, custom Hitch Receivers, and Sway Controls from date of purchase against defects in material and workmanship under normal use and service, ordinary wear and excepted, for the ownership life of the original consumer purchaser. Reese will replace FREE OF CHARGE any part which proves defective in material or workmanship when presented to any Reese dealer, Reese Warehouse or return to factory. TRANSPORTATION CHARGES PREPAID, at the address below. THIS WARRANTY IS LIMITED TO DEFECTIVE PARTS REPLACEMENT ONLY. LABOR CHARGES AND/OR DAMAGE INCURRED IN INSTALLATION OR REPLACEMENT AS WELL AS INCIDENTAL AND CONSEQUENTIAL DAMAGES CONNECTED THEREWITH ARE EXCLUDED. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Any damage to the Hitch, Custom Hitch receiver or Sway Control as a result of misuse, abuse, neglect, accident, improper installation, or any use violative of instructions furnished by us, WILL VOID THE WARRANTY. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. In the event of a problem Reese warrants its Hitches, Custom Hitch Receivers and Sway Controls from date of purchase against defects in material and workmanship under normal use and service, ordinary wear and tear excepted, for the ownership life of the original consumer purchaser. with warranty service or performance, you may be able to go to a small claims court, a state court, or a federal district court.

Reese Products, Inc.
51671 State Road 19-N
Elkhart, IN 46514

Reese Products of Canada, Ltd.
2351 Winston Park Drive
Oakville, Ontario
Canada L6K6R7