


Instructions for Use: Vise Mount  
(MV-400VM)

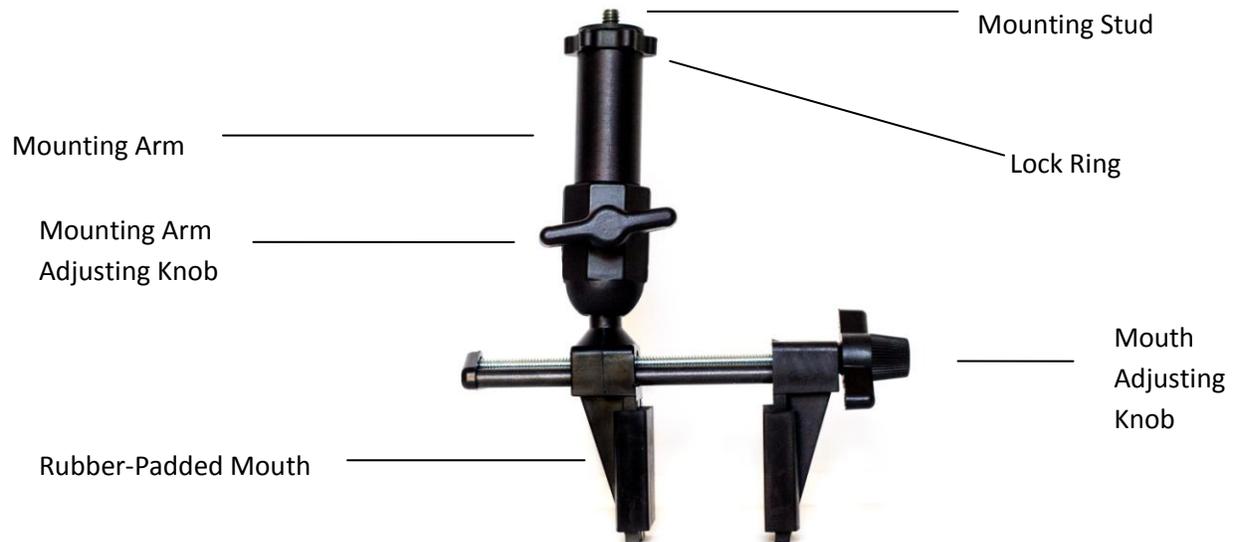

Caution - This mount is rated for cameras weighing 3 lbs (1.36 kgs) or less. **DO NOT OVERLOAD.** Camera mounts that are improperly attached or overloaded may come loose and cause property damage or personal injury. Delkin, Devices, Inc and Hyndsight Vision Systems, Inc. are not responsible for lost equipment, property damage, or injury caused by use of this product. Use at your own risk. All services must be tested prior to use.

- Install the camera onto the 1/4"-20 Mounting Stud. Do not remove the Rubber Washer. Tighten the Lock Ring firmly.
- Rotate the Adjusting Knob, located on the side of the Rubber-Padded Mouth, either clockwise or counterclockwise to adjust the width of the mouth.
- Position the two ends of the Rubber-Padded Mouth around the desired object. Tighten the Mouth Adjusting Knob to attach the Vise Mount. Do not overtighten.
- Loosen the Mounting Arm Adjusting Knob to adjust the positioning of the Mounting Arm. Retighten when the Mounting Arm is in the desired position.

2 Year Warranty - Delkin Devices, Inc. warrants to its customers that the Vise Mount is free from defects in materials and workmanship for a period of 2 years from the date of purchase. This warranty does not cover products damaged by mishandling or irregular use. We make no other warranty, expressed or implied, and will not assume any liability for damages, labor, or delays incidental hereto.