


Instructions for Use: Strap Mount  
(MV-800ST)

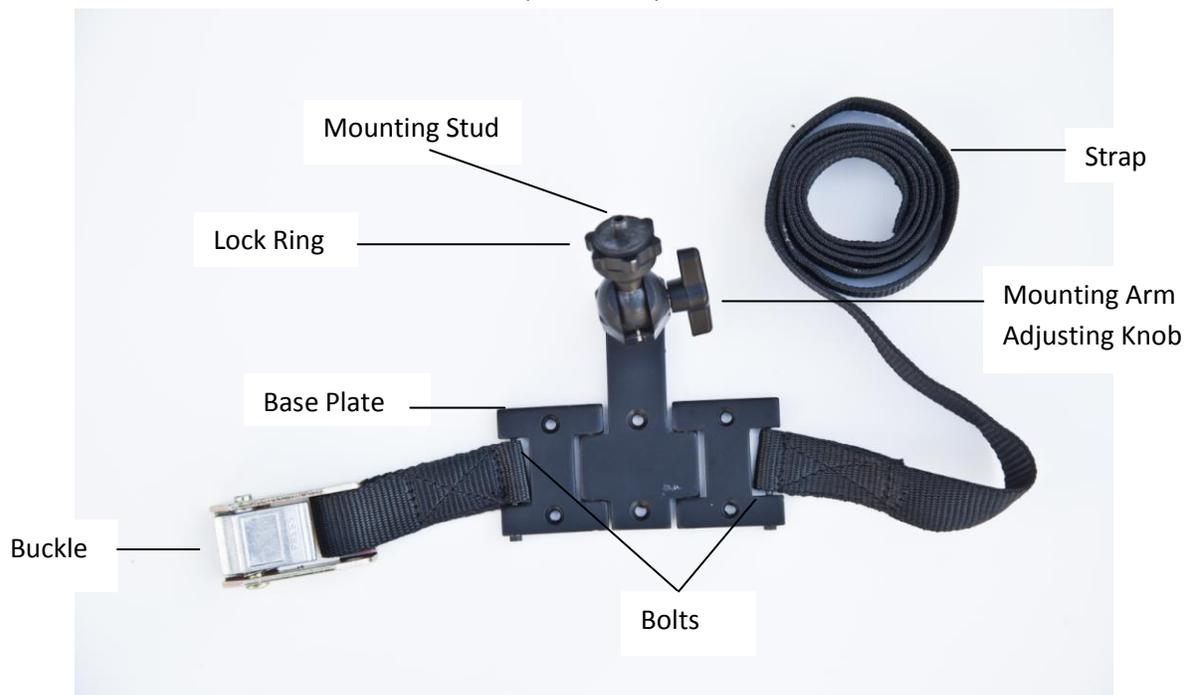

Warning: Improper strap attachment will cause the Strap Mount to slide or come loose. Please follow complete directions in package for proper set up.

Note: The Strap Mount requires some assembly before it can be strap mounted. Please use the included 3/32 Hex wrench to attach the short nylon strap to the base plate before use.

- Use the Hex wrench to unscrew the metal bolt on the right side of the base plate.
- Thread the metal bolt through the opening in the short strap. The word "press" on the metal buckle should be facing toward you.
- Retighten the metal bolt.
  
- The Strap Mount can be attached to any object with a circumference between 8 1/2" and 54" (21.59 cm and 137.16 cm).
- Take the two ends of the strap and wrap them around the desired object. *Make sure the base plate is positioned correctly: long section with the ball head pointing down.*
- Press down on the lever of the buckle to open up the mouth.
- With the mouth of the buckle opened, thread the long end of the strap upward into the mouth from the bottom of the buckle.
- Pull the strap through the mouth of the buckle until the mount is securely tightened around the object. Release the lever to clamp down on the strap.

- Mount your Hyndsight Camera by rotating the ball head's 1/4"-20 Mounting Stud clockwise into the camera's female 1/4"-20 tripod thread. Tighten the lock ring firmly.

#### How to Mount the Strap Mount to a Wall:

- Remove the two bolt holding the straps on each end of the base plate. Untighten both with the included 3/32 Hex wrench. Rotate the wrench counterclockwise until the bolts are loose enough to be removed.
- Drill up to six screws (#6-32 or #8-32) into the wall, through the holes located on the base plate. (Screws not included.)

Caution - This mount is rated for cameras weighing 8 lbs (3.63 kgs) or less. DO NOT OVERLOAD. Camera mounts that are improperly attached or overloaded may come lose and cause property damage or personal injury. Delkin, Devices, Inc and Hyndsight Vision Systems, Inc. are not responsible for lost equipment, property damage, or injury cause by use of this product. Use at your own risk. All services must be tested prior to use.

2 Year Warranty - Delkin Devices, Inc. warrants to its customers that the Vise Mount is free from defects in materials and workmanship for a period of 2 years from the date of purchase. This warranty does not cover products damaged by mishandling or irregular use. We make no other warranty, expressed or implied, and will not assume any liability for damages, labor, or delays incidental hereto.

[www.hyndsightvision.com](http://www.hyndsightvision.com) | 844.SEE.SAFE