


PORTABLE AIR CONDITIONERS


**PORT I 2000**



|                                       |                                                                                                    |
|---------------------------------------|----------------------------------------------------------------------------------------------------|
| <b>UPC Code:</b>                      | 8-42149-02574-8                                                                                    |
| <b>Cooling Capacity:</b> (BTU)        | 12,000                                                                                             |
| <b>Coverage:</b> (sq. ft)             | 450–550                                                                                            |
| <b>EER:</b>                           | 8.9                                                                                                |
| <b>Energy Star Rated:</b>             | No                                                                                                 |
| <b>Fan Speeds:</b> (cool/fan)         | 3/3                                                                                                |
| <b>Amps:</b>                          | 12.0                                                                                               |
| <b>Watts:</b>                         | 1,350                                                                                              |
| <b>Decibels:</b> (Hi/Mi/Lo)           | 56/55/54                                                                                           |
| <b>Vent Hose Length:</b> (in.)        | 59                                                                                                 |
| <b>Timer:</b>                         | 24 hr                                                                                              |
| <b>Unit Dimensions:</b> (WxHxD in.)   | 17 <sup>1</sup> / <sub>4</sub> x 28 <sup>1</sup> / <sub>2</sub> x 13                               |
| <b>Pkg Dimensions:</b> (WxHxD in.)    | 18 <sup>3</sup> / <sub>4</sub> x 34 <sup>3</sup> / <sub>4</sub> x 16                               |
| <b>Stuffing Qty:</b> (20'/40'/40' HQ) | 136/280/419                                                                                        |
| <b>Weight:</b> (net/gross lbs)        | 63/73                                                                                              |
| <b>Refrigeration:</b>                 | R410A                                                                                              |
| <b>Outlet Configuration:</b>          | <br>15 AMP 115V |

**FEATURES:**

- Electronic controls
- Temperature output range of 62°F–88°F (17°C–30°C)
- Bucketless drain system
- Auto restart function
- Easy to install & operate
- Sleep mode
- Easy access washable filter
- Full function remote control
- Easy roll casters
- Variable cooling speeds
- Slider kit & vent hose included

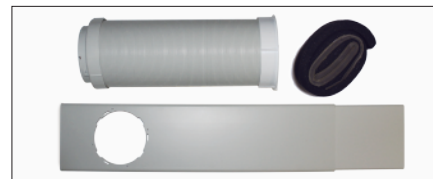

Slider Kit & Vent Hose included



Electronic Controls