




MAX-TIGHT HORSE FENCE

Designed for the serious horseman, the Max-Tight Horse Fence is manufactured using the Max-Tight Horse Safe Knot. This square knot provides extra vertical strength to withstand impact from large animals. It also allows flexibility for installation on hilly terrain. A unique feature to Max-Tight Horse Fence is the Versi-Tail. This allows for easier splicing of rolls and anchoring to corners by adding a 12" tail at the beginning of each roll and a 6" tail at the end. Versi-Tail allows for faster installation by eliminating the need to remove cross-wire staples to allow enough tail for tying to corners or splicing rolls. Class I galvanized horse fence resists corrosion which results in a longer fence life. Continuous vertical and horizontal wires, wrapped in a horse-safe knot with a third wire, provides the strength and rigidity as well as the safety needed for your prized animals.

MAX-TIGHT HORSE FENCE - CLASS I OR CLASS III ZINC COATING								
PRODUCT	FENCE HEIGHT	SPACING	INSIDE WIRE GAUGE	TOP & BOTTOM WIRE GA.	ROLL LENGTH	APPROX. WEIGHT LBS.	ROLLS PER PALLET	TAG COLOR
3'	36"	4" x 2"	12.5	10	100'	94	8	
4'	48"	4" x 2"	12.5	10	100'	122	8	
4'	48"	4" x 2"	12.5	10	200'	244	4	
4'	48"	4" x 2"	12.5	10	300'	348	4	
5'	60"	4" x 2"	12.5	10	100'	151	8	
5'	60"	4" x 2"	12.5	10	200'	296	4	
5'	60"	4" x 2"	12.5	10	300'	428	4	
6'	72"	4" x 2"	12.5	10	100'	179	8	

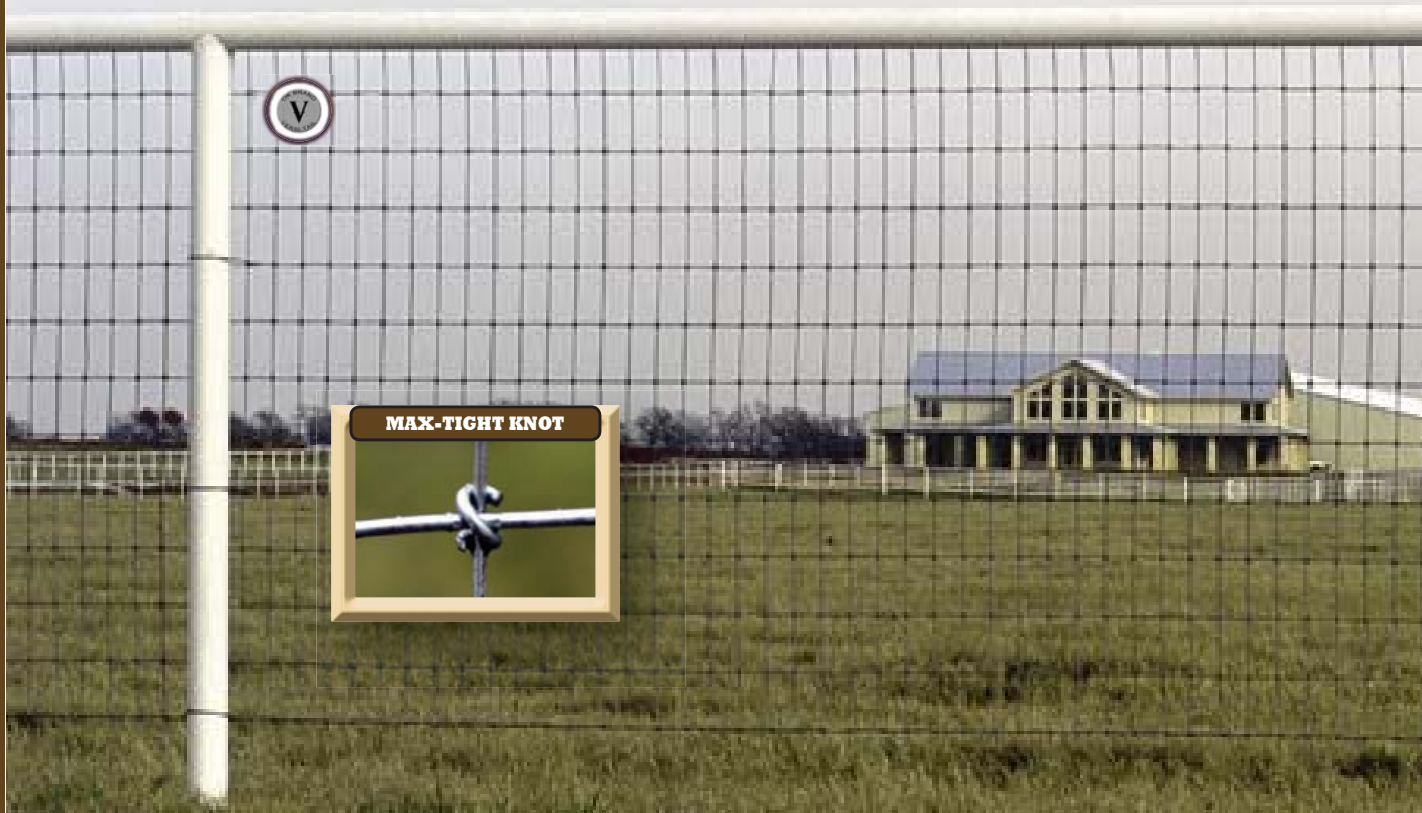

MAX-TIGHT HORSE FENCE

MAX-TIGHT HORSE FENCE - CLASS I OR CLASS III ZINC COATING

BARCODE	ITEM#	PRODUCT	APPROX. WEIGHT LBS.	ROLLS PER PALLET
755567048995	0489-9	3'	94	8
755567049008	0490-0	4'	122	8
755567049107	0491-0	4'	244	4
755567049343	0493-24	4'	348	4
755567049015	0490-1	5'	151	8
755567049114	0491-1	5'	296	4
755567049350	0493-25	5'	428	4
755567049022	0490-2	6'	179	8

