

SMD1500

SNOWMOBILE DOLLY SET MANUAL

READ ALL INSTRUCTIONS AND WARNINGS BEFORE USING THIS PRODUCT.

This manual provides important information on proper operation & maintenance. Every effort has been made to ensure the accuracy of this manual. These instructions are not meant to cover every possible condition and situation that may occur. We reserve the right to change this product at any time without prior notice.

IF THERE IS ANY QUESTION ABOUT A CONDITION BEING SAFE OR UNSAFE, DO NOT OPERATE THIS PRODUCT!

DO NOT RETURN THIS PRODUCT TO THE RETAILER!

If you experience a problem, have questions or need parts for this product, call Customer Service at **1-888-287-6981, Monday-Friday, 8 AM - 4 PM Central Time**. A copy of the sales receipt is required.

FOR CONSUMER USE ONLY – NOT FOR PROFESSIONAL USE. KEEP THIS MANUAL, SALES RECEIPT & APPLICABLE WARRANTY FOR FUTURE REFERENCE.

WARNING: DO NOT EXCEED 1,500 lb Max Capacity

SPECIFICATIONS: (1 EACH) Measures 7 inch x 7 inch, (2 EACH) 7.75 inch x 10 inch. 3.25 inch High. 2.5 inch casters provide 360° turning radius.

IMPORTANT SAFETY INSTRUCTIONS

WARNING: Read all instructions and warnings before use. Failure to follow all instructions may result in serious personal injury or product damage.

WARNING: Always keep dollies dry and free from excess moisture when loading snowmobiles onto the dollies. Excess moisture can cause dollies to become slippery and snowmobiles may slip off causing personal injury or product damage.

WARNING: Always check dollies for any cracks, dents or frame bending. If the structure of the dolly becomes compromised, it may not support your snowmobiles as intended. Snowmobiles that are not properly secured may result in personal injury or product damage.

WARNING: Always check dolly straps for any fraying, tears or knots. If the straps become knotted, torn or frayed, they may not support your snowmobile as intended. Snowmobiles that are not properly secured may result in personal injury or product damage.

WARNING: Do not exceed the 1500 lbs (682 kg) weight capacity. Failure to remain within the weight capacity of the dollies may result in personal injury or product damage.

WARNING: Do not use dollies for any purpose other than their intended use. Do not use to move persons as this may result in serious personal injury.

WARNING: Only use on a level surface that can support the weight of the load. Failure to use on a level surface may result in personal injury, loss of load and product damage.


WARNING: Do not use dollies to tow snowmobiles behind a vehicle of any kind. Dollies should only be moved by persons and at a speed no greater than a normal walking pace.

INSTALLTION OF FRONT SKI DOLLIES

- 1 Align one of the front-ridged dollies with the center of the right ski. Once the center of the ski has been found, secure the straps over the top of the ski so that the ski fits snug into the ridge in the center of the dolly.
- 2 When the ski is secure, ensure that the strap is tight and that there is no twisting or knots in the straps.
- 3 Align the other front-ridged dolly with the center of the left ski. Once the center of the ski has been found, secure the straps over the top of the ski so that the ski fits snug into the ridge in the center of the dolly.
- 4 When the ski is secure, ensure that the strap is tight and that there is no twisting or knots in the straps.

WARNING: Failure to align the dollies in the center of the skis can result in an unbalanced load. An unbalanced load can tip or become unstable which may result in personal injury, loss of load or product damage.


WARNING: Failure to ensure that the straps are secured properly over the tops of the skis may result in an unbalanced load. An unbalanced load can tip or become unstable which may result in personal injury, loss of load or product damage.

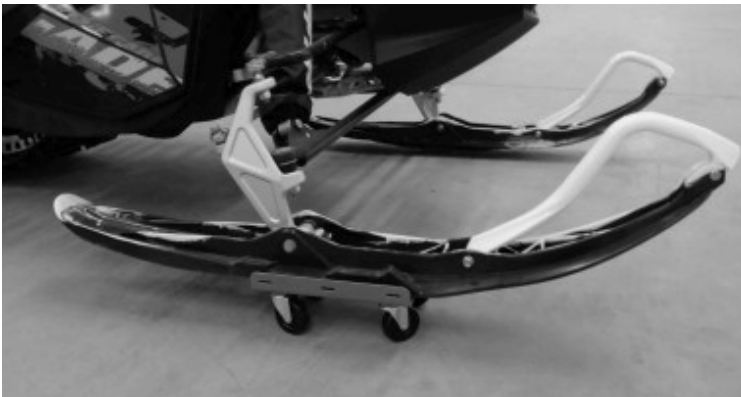

INSTALL REAR TRACK DOLLY

Place the flat-top dolly about 1 foot from the rear of the snowmobile in the center of the track. If the dolly is placed in the correct location, the load of the snowmobile will balance properly.

WARNING: Failure to secure the rear track dolly in the location specified by this manual may result in an unbalanced load. An unbalanced load can tip or become unstable which may result in personal injury, loss of load or product damage.

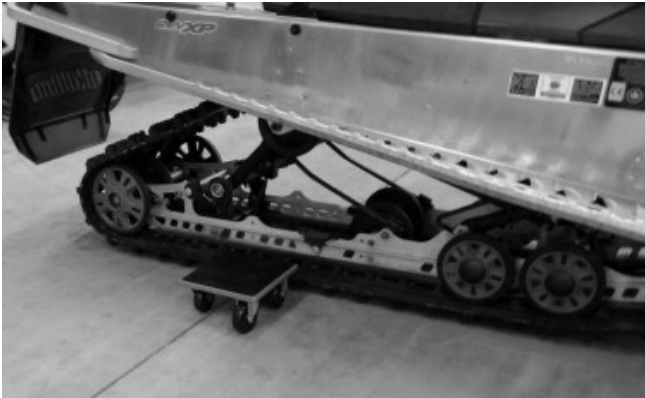

Ideal for moving snowmobiles and snowplows from driveway to storage area. Heavy duty steel with rust resistant powder-coated finish. Rubberized platforms fit and protect all sizes of skis. Sturdy, adjustable, nylon tie-down straps. Two 7.75 inch x 10 inch steel dollies grooved to fit under skis.

One 7 inch x 7 inch dolly for under the rear track.

3 roller units make a stored snowmobile easy to move. Set of 3 roller dollies carries up to 1500 pounds (682kgs).

High quality 2 1/2 " PVC swivel casters allow for easy 360° turning radius.

