



# Tote Caddy Trash Can Transporter

**MODEL: TC5000**

**⚠ WARNING**

**READ ALL INSTRUCTIONS BEFORE USING THE TRASH CAN CADDY**  
**NOTE: Failure to read instructions before use could result in injury or death.**

***WEIGHT CAPACITY 200 LBS***

## Instructions for Installation and Use:

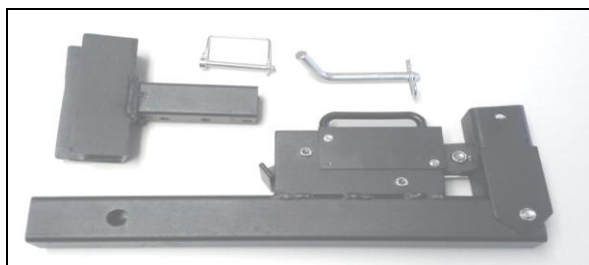


FIG. 1

**CONTENTS: SEE FIG. 1**

- 1 – TRASH CAN CADDY FRAME
- 1 – ½" RECEIVER PIN WITH KEEP PIN
- 1 – 1 ADJUSTABLE LIFT ARM
- 1 – 5/16" X 3" QUICK PIN

**\*\*NOTE\*\*** IF YOUR VEHICLE HAS A HITCH HEIGHT THAT IS HIGHER THAN 16" OR LOWER THAN 12", GREAT DAY'S HI-LO HITCH ADAPTER, MODEL# HL500 IS NEEDED FOR USE WITH THE TC5000. \*\*

**STEP 1- FIG. 2 & 2A -** ASSEMBLE TRASH CAN CADDY BY INSERTING ADJUSTABLE LIFT ARM INTO CADDY FRAME AND SECURE IN PLACE WITH 5/16" X 3" QUICK PIN.

**\*\*NOTE\*\*** LIFT ARM HAS 3 ADJUSTMENT HOLES. SELECT THE HOLE THAT OFFERS THE HIGHEST ADJUSTMENT BUT STILL ALLOWS TRASH CAN TO BE LOADED EASILY.



FIG. 2



FIG. 2A



FIG. 3

**STEP 2-SEE FIG. 3 –** SLIDE TRASH CAN CADDY INTO THE 2" RECEIVER ON VEHICLE AND SECURE WITH THE HITCH PIN & KEEPER.

**STEP 3 – SEE FIG. 4 -** MOVE TRIP LEVER HANDLE ON TRASH CAN CADDY TO THE UPRIGHT POSITION. THIS WILL ALLOW THE LIFT ARM TO PIVOT FORWARD TO THE LOWER LOADING POSITION.



FIG. 4

**STEP 4 – SEE FIG. 5 –** TILT TRASH CAN BACK & ROLL FORWARD UNTIL THE MIDDLE HANDLE OF TRASH CAN IS OVER THE LIFT BRACKET. LOWER TRASH CAN UNTIL HANDLE IS ENGAGED IN THE LIFT BRACKET. **SEE FIG. 6**



FIG. 5



FIG. 6

**STEP 5 – SEE FIG. 7 –** MOVE TRIP LEVER HANDLE TO THE DOWN POSITION. PUSH TRASH CAN TOWARD TRUCK. THIS WILL RAISE THE TRASH CAN OFF THE GROUND.



FIG. 7



FIG. 8

**STEP 6 – SEE FIG. 8 –** CONTINUE TO RAISE TRASH CAN UNTIL CAN STOPS MOVING. THIS WILL ENGAGE THE LIFT ARM TO HOLD THE TRASH CAN OFF OF THE GROUND FOR TRANSPORT TO THE DROP OFF LOCATION.

**STEP 7 – SEE FIG. 9 –** AFTER REACHING DROP OFF LOCATION, RETURN THE TRIP LEVER TO THE “UP” POSITION. ROCK THE TRASH CAN FORWARD TO RELEASE THE LIFT ARM THEN LET THE TRASH CAN LEAN BACK UNTIL THE WHEELS ARE ON THE GROUND, THEN BACK AWAY FROM VEHICLE.



FIG. 9

**⚠ WARNING**

DO NOT EXCEED WEIGHT CAPACITY OF 200 LBS.

**⚠ WARNING**

MAKE SURE TC5000 IS PROPERLY SECURED TO THE VEHICLE WITH HITCH & KEEP PIN.

**⚠ WARNING**

NEVER USE TC5000 FOR ANY PURPOSE OTHER THAN TRANSPORTING A TRASH RECEPTACLE.

**⚠ WARNING**

NEVER ALLOW ANY PERSON TO RIDE ON TC5000.

**⚠ WARNING**

NEVER USE TC5000 ON A PUBLIC ROAD.

**⚠ WARNING**

NEVER OPERATE VEHICLE AT AN UNSAFE SPEED WHILE USING THE TC5000.

**⚠ WARNING**

ALWAYS AVOID DEEP HOLES AND/OR DITCHES WHILE USING THE TC5000.

For more information about this or other products, contact us at:

**Great Day, Inc.**

604 Kimbrough Dr. \* Tallulah, LA 71282 \* (866) 649-1918 \* [www.greatdayinc.com](http://www.greatdayinc.com)

[https://www.youtube.com/watch?feature=player\\_detailpage&v=NJOspGCi-q0](https://www.youtube.com/watch?feature=player_detailpage&v=NJOspGCi-q0)