

# TENAX<sup>®</sup>

SOLUTIONS ALL AROUND YOU

## SENTRY SECURA SAFETY FENCE

MALLA DE SEGURIDAD SECURA SENTRY / CLÔTURE DE SÉCURITÉ SECURA SENTRY



**RECOMMENDED USES**  
**Safety fence for use on construction sites, parking lots and warehouses.**  
**Spanish:** Malla de seguridad para uso en obras de construcción, estacionamientos y bodegas.  
**French:** Barrière de sécurité pour une utilisation sur des chantiers de construction, des parkings et des entrepôts.

**Safety fence for use around hazard, traffic or pedestrian areas.**  
**Spanish:** Malla de seguridad para usar alrededor de zonas de peligro, tráfico o peatones.  
**French:** Barrière de sécurité pour une utilisation dans des zones dangereuses, de trafic intense ou des zones piétonnes.

**Crowd control-sporting events, parades, fairs and carnivals.**  
**Spanish:** Malla para control de multitudes en escenarios deportivos, desfiles, ferias y carnavales.  
**French:** Contrôle de la foule lors d'événements sportifs, de défilés, de foires et de carnivals.

**Property delineation.**  
**Spanish:** Delimitación de la propiedad.  
**French:** Délimitation de la propriété.



# 4-FT x 50-FT

## 1.21-M x 15.24-M

MESH SIZE 1.46-IN x 1.46-IN

Spanish: tamaño de malla 3.7-CM x 3.7-CM / French: maillage 3.7-CM x 3.7-CM


FINISHED EDGE ORANGE / NARANJA BORDE ACABADO / BORD FINI ORANGE

Scan the code for instructions.  
 Spanish: Lea el código para obtener instrucciones.  
 French: Scannez le code pour les instructions.

**Toolkit**

**YOU MAY NEED**

- posts
- mallet
- fence ties
- wood slat

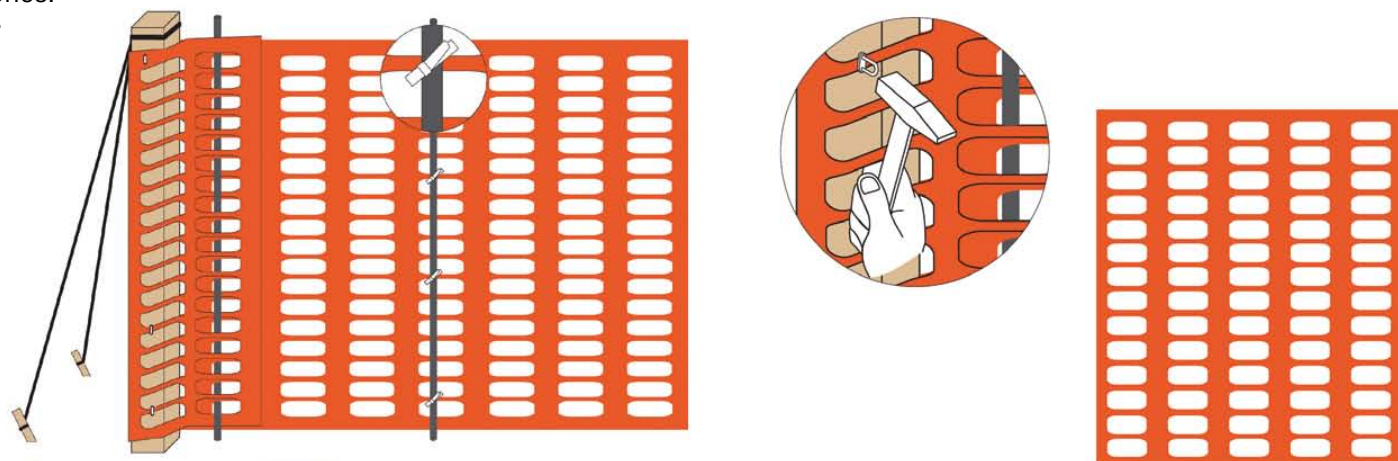

### INSTRUCTIONS

(1) Your Tenax Fencing can be installed using metal or fiberglass posts. (2) If installing a 4 foot fence, use a post that is 5-6 feet tall. (3) Drive at least 1 foot of post into the ground using a mallet. (4) One post should be placed every 8-10 feet. (5) Fence should be stretched across posts and attached using 3 fence ties securing the fence at the top, middle, and bottom of each post. (6) To connect fence sections, overlap two ends and weave a wood slat through the overlapped strands, secure the slat with fence ties. For additional strength secure the joined area to a post.



**TENAX CORPORATION**  
 4800 E. Monument Street / Baltimore, MD 21205  
 phone 410-522-7000 / fax 410-522-3190 / [www.tenaxus.com](http://www.tenaxus.com)