

REESE

INSTALLATION INSTRUCTIONS

Product No.

FORD AND DODGE PICKUP TRUCKS

36025

You *can* take it with you.

ELKHART, IN., OAKVILLE, ONT.


SMALL PARTS PACKAGE 36556

WARNING: DO NOT LUBRICATE THREADS, BOLT FAILURE MAY OCCUR DUE TO OVER TIGHTENING.

WARNING: DO NOT DRILL OR WELD TO THIS HITCH.

IMPORTANT NOTES

USE ONLY REESE SUPPLIED OR APPROVED BOLTS, LOCKNUTS, AND WASHERS TO INSTALL THIS HITCH

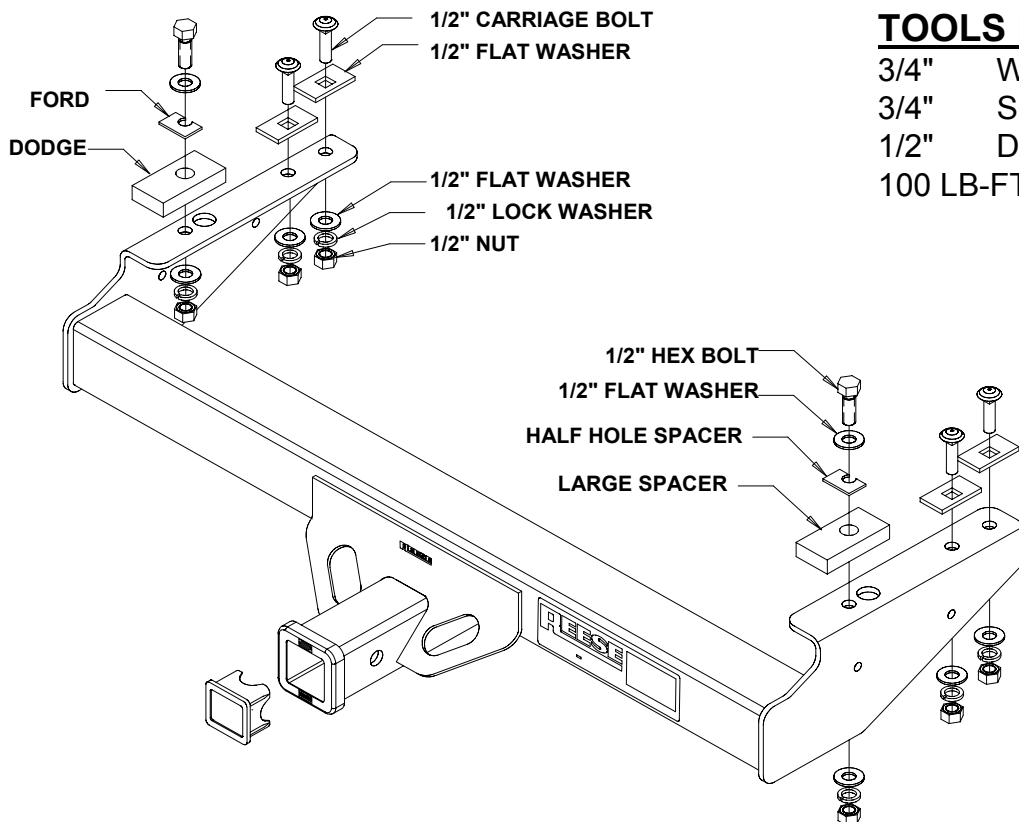

TOOLS REQUIRED

3/4" WRENCH
3/4" SOCKET
1/2" DRILL
100 LB-FT TORQUE WRENCH

CAUTION: When drilling holes in the frame, make sure that electrical wires are not damaged. If necessary, move them before drilling.

WARNING: **HYDRAULIC BRAKE HOSES MUST NOT TOUCH THE SPARE TIRE.** Some 'oversize' tires are too large and will not have safe clearance with brake hoses. These tires must be mounted elsewhere.

1. Loosen or remove spare tire assembly.

FORD PICKUP EXCEPT FLARESIDE WITH ROLLED PAN

2. Clamp the hitch to the frame with the large holes over the rivet heads. Match drill six 1/2" holes in the frame flange.
3. Insert four 1/2" carriage bolts with bolt plates down through the front holes. Install flat washers, lock washers, and nuts on the bolts.
4. Insert two 1/2" bolts with flat washers and half hole spacers through the rear holes. Spacers level the washers on the crossmember. Install flat washers, lock washers, and nuts. Go to step 5.

DODGE

2. Insert two 1/2" bolts with large spacers through the large holes (1-1/4") near the rear of the frame. Position the hitch on the bolts and loosely install flat washers, lock washers, and nuts on the bolts.

(OVER)

DODGE (CONT.)

3. Push the hitch forward and center it on the frame. Tighten the rear nuts to hold it in place. Match drill four 1/2" holes for the front mounting bolts. Insert four 1/2" carriage bolts with bolt plates down through the front holes. Install flat washers, lock washers, and nuts on the bolts. See the diagram on the other side. Go to step 5.

FORD FLARESIDE WITH ROLLED PAN (NOT STEP BUMPER)

2. Clamp the hitch to the frame so the brackets clear the rolled pan and so the rear mounting bolt hardware will fit in the front of the crossmember. The large hole in the bracket will be about 2-1/2" ahead of the rivet.
3. Match drill six 1/2" holes in the frame flange. Insert 1/2" bolts with flat washers or bolt plates as shown.
4. Lower one side of the hitch enough to install a large spacer on the rear bolt and two flat washers on the center bolt. Lift the hitch and install flat washers, lock washers, and nuts on the bolts. Repeat for the other side. Go to step 5.


FORD BRONCO

2. Clamp the hitch to the frame so the brackets are as far rearward as possible. Match drill six 1/2" holes in the frame flange.
3. Screw one of the 1/2" carriage bolts onto the pull wire provided. Thread a bolt plate over the bolt. Insert the end of the pull wire up beside the gas tank and down through one of the drilled holes, a small spacer, and the bracket. Repeat for the other 5 mounting holes. Use two 1/2" flat washers instead of small spacers on the middle mounting holes for both brackets. See the diagram to the right.
4. Install 1/2" flat washers, lock washers and nuts on all six mounting bolts. Go to step 5.


GENERAL

5. Torque 1/2" hardware to 70 ft.*lb.
6. Reinstall the spare tire assembly. It may be necessary to trim the lifting socket (pipe) on the Ford spare tire bracket assembly. The spare tire bracket on the Dodge may need to be relocated.

FORD FLARESIDE WITH ROLLED PAN FRAME LINE

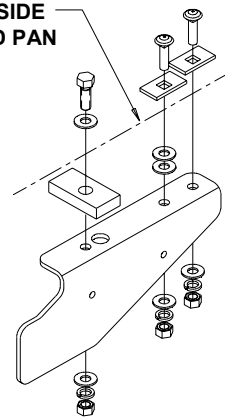

FRAME
SMALL SPACER

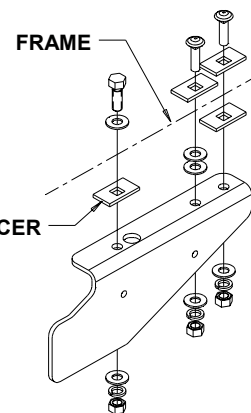

THIS PRODUCT COMPLIES WITH SAFETY SPECIFICATION AND REQUIREMENTS FOR THE STATE OF NEW YORK AND VESC REGULATION V-5 FOR CONNECTING DEVICES AND TOWING SYSTEMS. WEIGHT DISTRIBUTING HITCH RATING IS 12,000 LB. MAX. GROSS TRAILER WEIGHT AND 1200 LB. MAX. TONGUE WEIGHT. WEIGHT CARRYING HITCH RATING IS 7500 LB MAX GROSS TRAILER WEIGHT AND 750 LB MAX TONGUE WEIGHT. CONSULT VEHICLE OWNERS MANUAL FOR TOWING RECOMMENDATIONS AND LIMITATIONS.

LIMITED WARRANTY

Reese warrants its Hitches, custom Hitch Receivers, and Sway Controls from date of purchase against defects in material and workmanship under normal use and service, ordinary wear and excepted, for the ownership life of the original consumer purchaser. Reese will replace FREE OF CHARGE any part which proves defective in material or workmanship when presented to any Reese dealer, Reese Warehouse or return to factory. TRANSPORTATION CHARGES PREPAID, at the address below. THIS WARRANTY IS LIMITED TO DEFECTIVE PARTS REPLACEMENT ONLY. LABOR CHARGES AND/OR DAMAGE INCURRED IN INSTALLATION OR REPLACEMENT AS WELL AS INCIDENTAL AND CONSEQUENTIAL DAMAGES CONNECTED THEREWITH ARE EXCLUDED. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. Any damage to the Hitch, Custom Hitch receiver or Sway Control as a result of misuse, abuse, neglect, accident, improper installation, or any use violative of instructions furnished by us, WILL VOID THE WARRANTY. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. In the event of a problem Reese warrants its Hitches, Custom Hitch Receivers and Sway Controls from date of purchase against defects in material and workmanship under normal use and service, ordinary wear and tear excepted, for the ownership life of the original consumer purchaser. with warranty service or performance, you may be able to go to a small claims court, a state court, or a federal district court.

Towing Products
PO Box 8102
47774 Anchor Ct.
Plymouth, MI 48170

Towing Products
2351 Winston Park Drive
Oakville, Ontario
Canada L6H6R7