

## ABRASIVE SPOT BLASTING KIT

## OPERATOR'S MANUAL

STORE THIS MANUAL IN A SAFE  
PLACE FOR FUTURE REFERENCE

### SATISFACTION GUARANTEED

Satisfaction is guaranteed. If for any reason you are not completely satisfied with your purchase, please return it to any Tractor Supply Co.® store.



### SATISFACTION GUARANTEED

Satisfaction is guaranteed. If for any reason you are not completely satisfied with your purchase, please return it to any Tractor Supply Co.® store.



Distributed by:  
TRACTOR SUPPLY COMPANY  
5401 VIRGINIA WAY  
BRENTWOOD, TN 37027  
For customer support, call: 1-888-376-9601  
www.TractorSupply.com



**WARNING:** BEFORE USE, READ AND UNDERSTAND OPERATOR'S MANUAL. Improper operation or maintenance of this product could result in serious injury and property damage. Read and understand all warnings and operation instructions before using this equipment. When using air tools, basic safety precautions should always be followed to reduce the risk of personal injury.

**WARNING:** This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. Wash hands after handling.

**WARNING:** Contains lead. May be harmful if eaten or chewed. May generate dust containing lead. Keep out of the reach of children.

# ABRASIVE SPOT BLASTING KIT

Thank you for purchasing Hand Held Abrasive Blaster.  
To make sure the Blaster is assembled and used correctly,  
carefully follow all instructions.

1. Fill Abrasive Media Bag with abrasive media.

**WARNING:** Do not use sand or silica based abrasives.

2. Firmly attach the Abrasive Media Bag to the Abrasive Gun  
using the clamp provided.

3. Attach the desired nozzle to the Abrasive Gun.

4 nozzles are included: General Use Nozzle, Edge Nozzle,  
Inner Corner Nozzle, and Outer Corner Nozzle. Use the  
nozzle which is best suited for your project.

4. Attach Air Hose with Quick Connect Coupler to Quick  
Connect Fitting on Abrasive Gun.

5. Set air pressure between 80-100 PSI, depending on grit size  
and finish required.


6. Point Abrasive Gun in a safe direction away from people, pets  
or anything around you that may be damaged by direct or  
indirect abrasive spray.

7. Place the Abrasive Gun Nozzle against a scrap piece of metal.  
Pull the trigger to discharge excessive grit in the feed tube.

8. Hold the opening of the Nozzle firmly against the workpiece.

9. Pull the trigger for a few seconds at a time. Check the  
progress of the workpiece frequently.

10. Release trigger to stop.

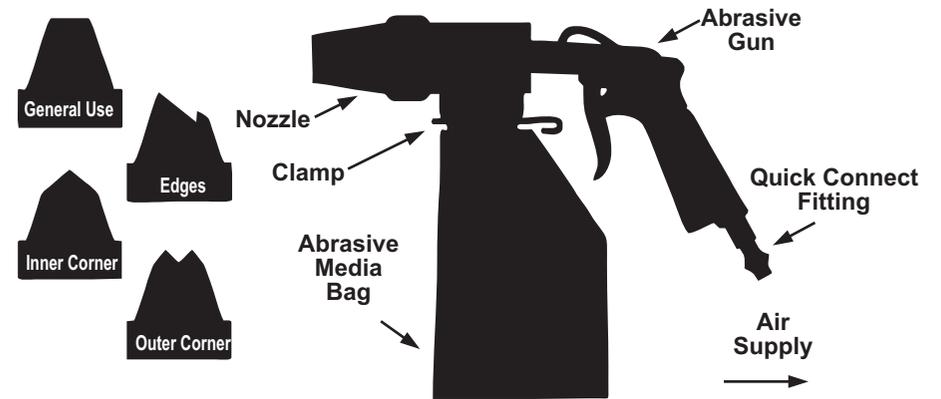

11. When finished abrasive blasting, disconnect air supply from  
Abrasive Gun.

**NOTE:** Shake the Abrasive Gun frequently. This makes sure the  
abrasive media will be drawn up correctly.

**WARNING:** Never open Abrasive Media Bag when air  
compressor is attached.

## USING THE BLASTING TEMPLATE

1. Attach the General Use Nozzle to the Abrasive Gun.

2. Align the desired shape on the Blasting Template with the  
area of the workpiece you intend to blast.

3. Hold the opening of the nozzle firmly against the desired  
shape on the Blasting Template.

4. Operate the Abrasive Gun as described in steps 9-11 of the  
previous section.