


NEW STRONGER DREAMHOUSE : FIBER POLE AND TIE DOWN DIAGRAM

TO INSERT THE FIBER POLES WITH RED STICKER TO THE HORIZONTAL FIBER POLE THAT HAS CONNECTOR WITH RED STICKERS

TO INSERT THE FIBER POLES WITH GREEN STICKERS TO THE GREEN WEBBING POCKETS ON EACH OF THE 2 SIDES

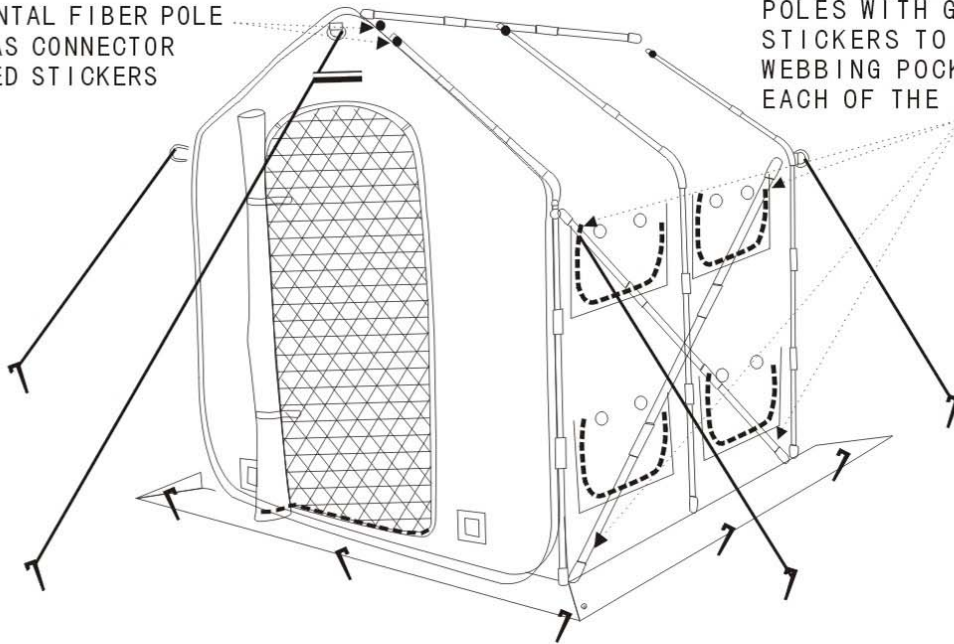

DreamHouse set-up

Step 1. Unpack FlowerHouse and accessories, allowing the spring steel bands to pop open.

Step 2. Take fiberpoles out of pack and assemble completely. Ensure poles are fully seated into each other. You will have 6 "L" shaped poles, 4 straight poles and 1 straight pole with cross members.

Step 3. Install the sidewall support poles (4 equal length poles) by inserting the poles into the pockets sewn inside the FlowerHouse in each sidewall corner. Install one pole at a time, diagonally to form an "X" in each wall. Secure poles with ties sewn into the wall.

Step 4. Install top roof support pole which has one "X" fitting and two "T" fittings. The "L" shaped poles insert into these fittings.

Step 5. Install the "L" shaped poles by inserting the top end into the fittings in the roof support pole. The bottom of the pole is inserted into the corresponding pocket sewn at the floor, leave the pole off center till the matching pole is in place on the other side of the greenhouse. Once both poles are installed, push poles into place.

Step 6. Stake Greenhouse in place and install high wind tie downs.

(Hint: Fiberpole pockets may be obscured behind the spring steel bands. Pull the band away from the wall and insert fiberpoles into pockets)