

## ZIPPER DOOR ENCLOSURE KIT (15075)

This kit requires the use of Folding Windshield part number 2-18411



### TOOLS REQUIRED\*

- 10mm Wrench
- 10mm Ratchet

- 1** Remove the hard top if one is already installed. Loosely install the soft enclosure on the UTV. Install the lower straps under the UTV in a "X" formation as shown in figure 1. Snug the straps so the cover does not come loose.



fig. 1

- 2** Run the driver's side upper strap to the passenger-side, routing it under the frame. Connect it to the upper passenger-side strap as shown in figure 2.

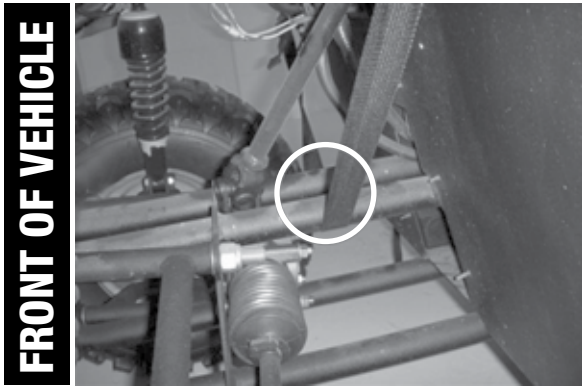


fig. 2

- 3** Run the lower strap to the driver's side routing it over the frame. Route the strap that is located below the seat frame to the front strap.



fig. 3

- 4** Route the back strap around the frame tube as shown in figure 4.

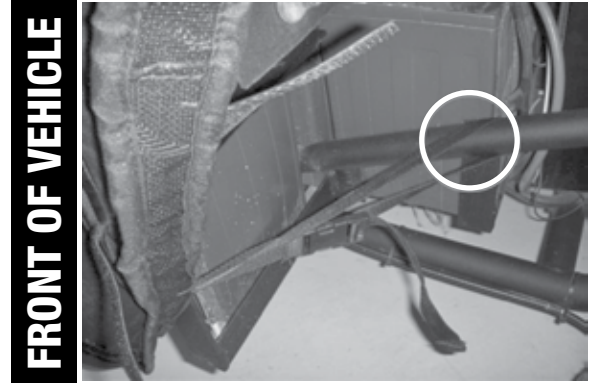


fig. 4

- 5** Apply the Velcro tape to the windshield tube and Velcro the windshield down as shown in figure 5.

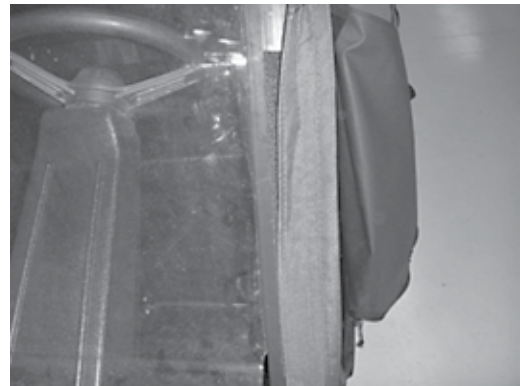


fig. 5

- 6** Velcro the straps around the cab at the top of the windshield and the straps on the windshield tube as shown in figure 6.



fig. 6

## ZIPPER DOOR ENCLOSURE KIT (15075)

**This kit requires the use of Folding Windshield part number 2-18411**

- Tighten down the straps located under the frame.
- Tighten down the front straps.
- Tighten down the rear straps.

Make sure the enclosure is fitted properly. Loosen straps and move the enclosure if necessary.

- 7** Fasten all the Velcro strips inside the cab as shown in figures 7 through 10.



**fig. 7** Passenger and driver-side cab corners



**fig. 10** Windshield straps



**fig. 8** Passenger and driver-side cab corners



**fig. 9** Passenger and driver-side A pillar straps

- 8** If not using a hard top, install the enclosure roof brace using the 10mm socket and ratchet as shown in figure 11.

**NOTE: Holes will need to be created in the soft top if installing a hard top roof kit.**



**fig. 11**