

# BUFFALO GUNSAFEXL MANUAL

**AS15-**

(record your personal 3-8 digit security code)

(your Serial number begins with **AS15**)

## **COMPLETE & SUBMIT REGISTRATION CARD TO VERIFY OWNERSHIP KEEP THIS MANUAL AND SALES RECEIPT FOR FUTURE REFERENCE**

If you experience a problem or have questions, visit <http://www.buffalotools.com> or call Customer Service at **1-888-287-6981, Monday-Friday, 8 AM - 4 PM Central Time**. A copy of the sales receipt is required.

### **Install the 9V battery, located in the front protective styrofoam (See BATTERY INSTALLATION)**

To open an electronic lock the first time, press the following numbers/symbols on the electronic keypad:  
User code Number 1 --- Factory set to 159#    User code Number 2 --- Factory set to 159#

(These numbers are preset. You should change the entry code as soon as possible after opening the safe to insure proper security.)

After you have entered the factory code, you will need to **turn the handle clockwise to open the door**. You will have 5 seconds to turn the handle before the locking mechanism is reactivated. When the valid code entered, the lock will beep twice and the green LED turns on. When an invalid code entered, the lock will keep beeping and the yellow LED flashes.

## **ENTERING YOUR SECURITY CODE**

### **CHANGING USER CODE #1**    ALWAYS PERFORM THE OPERATION WITH THE DOOR OPEN

- 1) Press the "reset" button, the lock will beep twice and the yellow LED turns on. (The "reset" button is located on the back cover or the side frame (hinge side) of the door or inside the lower back cover of the door. Reset button is a red or green colored button.)
- 2) Enter your new digit code (1-8 digits), then press \* button.
- 3) Test the lock operation several times before closing the door.

### **CHANGING USER CODE #2**    ALWAYS PERFORM THE OPERATION WITH THE DOOR OPEN

- 1) Enter "00" on the keypad, and then press the "reset" button.  
The lock will beep twice and the yellow LED turns on
- 2) Enter your new digit code (1-8 digits), then press \* button.
- 3) Test the lock operation several times before closing the door.

## **DO NOT SHUT THE DOOR UNTIL YOU HAVE CONFIRMED THAT THE NEW SECURITY CODE HAS BEEN ENTERED CORRECTLY.**

**\*WRONG TRY PENALTY** --- Entry of three (3) consecutive invalid codes starts a 15 minute lock out.  
(During lock out, the key pad will not respond to any operation.)

If the code fails, follow steps 1 and 2 again. If the code works successfully, record your combination number on the front of this form or somewhere in your records, then you should lock the safe. When you open the safe in the future, enter the security code you have set followed by the "#" symbol.

## SPECIFICATIONS

Size: 59"(H) x 39"(W) x 24"(D) / Internal Dimensions: 56.5" x 36.6" x 19" / Internal Size = 22.75 CuFt  
30 Minute Fire Protection @ 1200 Degrees / 14 Gauge Body & Door  
10 x Locking Bolts 1" Dia. (7 Bolts are Live, 3 Bolts are Dead ) / 4 Floor Mounting Holes

## TURNING THE KEYPAD SOUND OFF/ON

To turn the "Beep" sound off, enter code \*633 on the keypad.  
To turn the "Beep" sound on, enter the code \*66 on the keypad.

## BATTERY INSTALLATION

**Note:** When changing the battery, always hold the battery connecting cap while disconnecting or attaching the battery. Do not pull on the wires. Doing this could cause the power supply to become disconnected from the lock.



**This lock requires one 9V alkaline battery.** Under normal use, batteries will last about 1 year. When the battery is low and you press a button on the keypad, a red light will come on warning you that the battery is low.

To test the battery, enter your security code. If the batteries are low, the red light will come on momentarily. To replace the battery, remove the cover by pressing the tab and turning the cover as shown in the illustration below. Replace the old battery and screw the cover back in place.

## TROUBLE KEY/OVERRIDE KEY


A "Trouble Key or Override Key" has been included in the event that you have forgotten or lost your security code. Please record the number of your key in a safe location in the event the key needs to be replaced in the future. To open the safe using the trouble key, follow the steps below:

1. Remove the cover by turning the cover as shown in the illustration. The lock can hang by the connecting cable while unlocking the safe.
2. Insert the key in the key hole and turn clockwise 1/4 turn (until stopped) in order to unlock the safe.
3. Keep the door open until you have entered a new security code. Before entering your new security code remove the key and screw the cover back in place.
4. Enter your new security code. (DO NOT STORE KEY IN SAFE)

## REPLACEMENT TROUBLE KEY/OVERRIDE KEY

**Verification of ownership is required in order to receive replacement key.** Contact Customer Service at **1-888-287-6981** to verify registration, then complete the Replacement Form, along with required Service Fees. The Replacement Form must include the Serial Number and Lock number, and be notarized by a non-family member.

## REMOVE BRACKETS UPON INSTALLATION

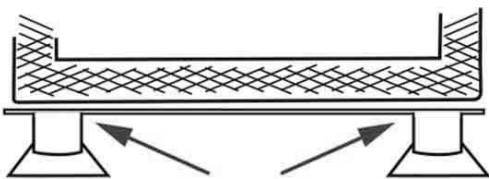

**BRACKETS ARE USED  
FOR SHIPPING PURPOSES ONLY**

**ATTENTION!**  
WHEN REPLACING  
BATTERY, DO NOT PULL  
HARD ON KEY PAD, AS THIS  
WILL CAUSE THE KEY PAD  
CABLE TO UNPLUG FROM  
CIRCUIT BOARD