


# Eagle EPDM Suction

## Heavy Duty Suction / Discharge Hose

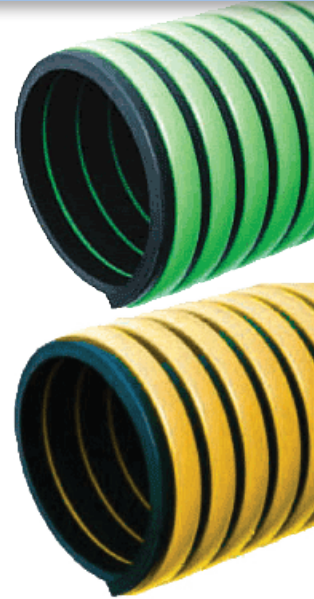

- Application:**
- Liquid waste suction, septic handling
  - Cesspool cleaning, slurries/sludge handling
  - Chemicals, dry material, grain transfer
  - Mining and marine use
- Tube:** EPDM blend rubber
- Reinforcement:** Plastic helix
- Temperature:** -40°F to +140°F
- Couplings:** Contact JGB for proper fitting recommendation and coupling procedure.

### Features:

- Specially compounded rubber wall, exposed plastic helix
- Excellent resistance to chemicals
- Lightweight and flexible
- Smooth bore, exposed helix - easy to drag

Part #		ID	OD	WP	Vacuum Rating	Min. Bend Radius	Weight	Std. Length
Green	Yellow	in	in	psi	in/HG	in	lbs/ft	ft
004-0169-0050I	004-0163-0050I	1	1.34	50	29	1.9	0.23	100
004-0209-0050I	004-0203-0050I	1-1/4	1.65	50	29	3.2	0.34	100
004-0209-0050I	004-0243-0050I	1-1/2	1.85	50	29	3.5	0.41	100
004-0329-0050I	004-0323-0050I	2	2.43	50	29	5.5	0.67	100
004-0489-0045I	004-0483-0045I	3	3.52	45	29	7.5	1.10	100
004-0649-0040I	004-0643-0040I	4	4.6	38	29	11.5	1.84	100



Download the JGB® Mobile App



Click for directions:

**JGB® Headquarters**  
Liverpool, NY 13088  
(315) 451-2770

**Buffalo Branch**  
Cheektowaga, NY 14225  
(716) 684-8224

**Southeast Hub**  
Charlotte, NC 28273  
(704) 588-9920

**St. Louis Branch**  
St. Louis, MO 63123  
(704) 588-9920

**Williston Branch**  
Williston, ND 58801  
(701) 774-2195

**Houston Branch**  
Pasadena, TX 77503  
(281) 930-7777

Connect with us:



[www.jgbhose.com](http://www.jgbhose.com)