



# 'S' SERIES SELF-PRIMING CENTRIFUGAL PUMP

A high performance transfer pump powered by Honda's GC Series OHC engine.




### Pump:

- Constructed of corrosion resistant polyester.
- Stainless Steel fasteners throughout.
- EPDM elastomer (Buna and Viton® available).
- Stainless steel shaft seal with carbon and ceramic faces.
- 2" ports.
- Maximum shut off pressure 52 psi.
- Suction Lift to 25 ft (7.6 meters)
- Flows to 200 GPM

### Engine:

- Honda Series GC160, 160cc.
- Overhead cam design for quiet, dependable operation.
- Fast, easy, reliable starting.
- Meets Carb and EPA emission standards.
- Reduced fuel and oil consumption.

PERFORMANCE CURVES

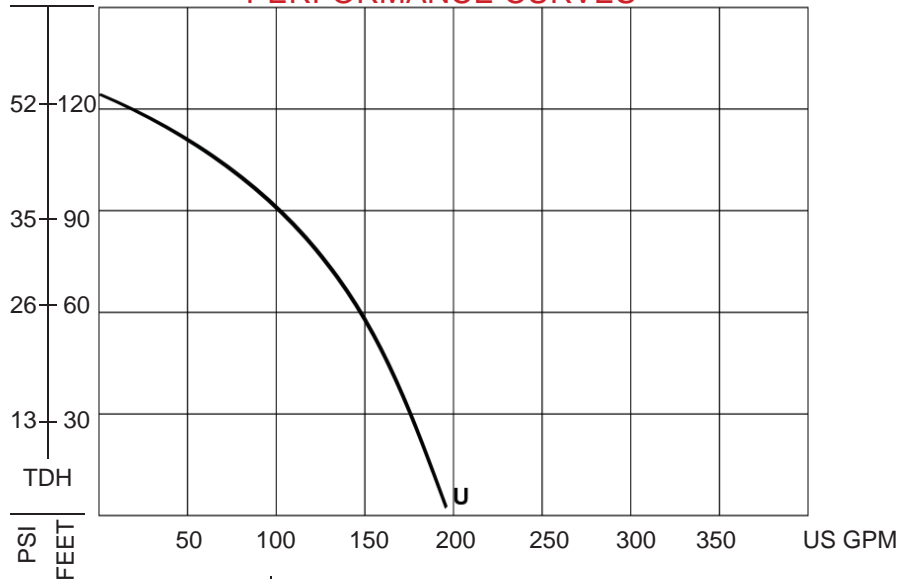

| CURVE | MODEL       | PORT SIZE | MAX FLOW | MAX TDH | WEIGHT |
|-------|-------------|-----------|----------|---------|--------|
| U     | SE2UL E5HOC | 2" NPT    | 200 GPM  | 126 ft  | 40 lbs |




## CARING FOR PACER PUMPS

When handling agriculture fertilizer and chemicals, flush pump with fresh, clean water and drain completely.

EPDM rubber components are not compatible with petroleum products. Do not use petroleum products when preparing pump for storage.

- Housing, volute and impeller: glass-reinforced polyester.
- Rubber parts: EPDM (Buna and Viton® available).
- Shaft seal: Stainless steel with carbon and ceramic faces, EPDM fitted.
- Hardware: internal and external stainless steel fasteners.
- Working pressure: to 52 PSI.
- Flow: to 230 GPM.

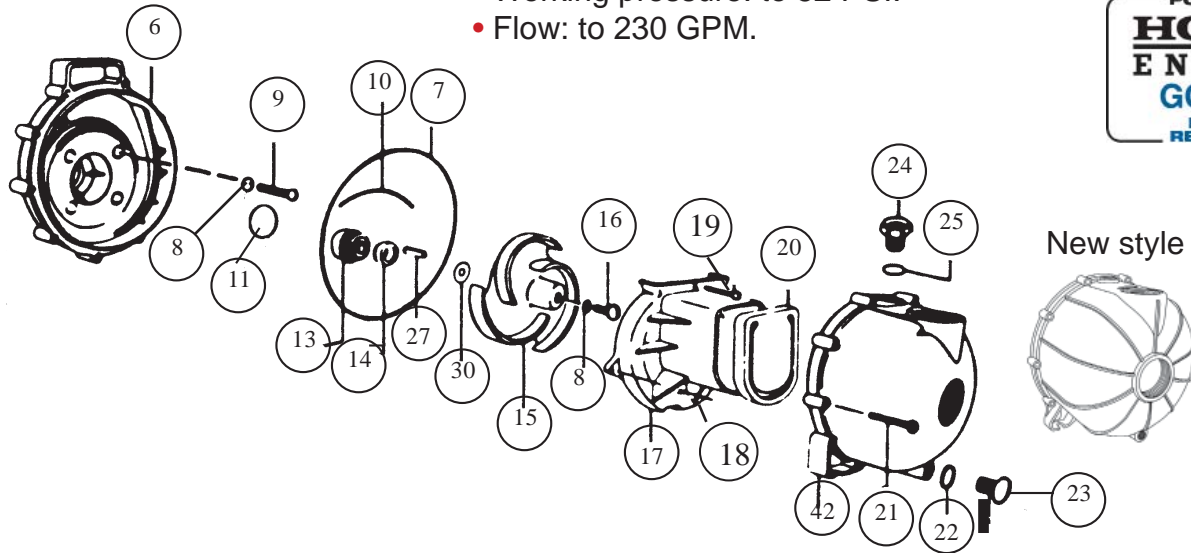

### Parts list for model numbers starting with SE2PL, SE2UL and SE2RL.

| REF. NO.    | DESCRIPTION           | QTY/PUMP    | SE2PL                | SE2UL                | SE2RL                |
|-------------|-----------------------|-------------|----------------------|----------------------|----------------------|
| 6           | Bracket               | 1           | P-58-0703 30B        | P-58-0703 30B        | P-58-0703 30B        |
| 7           | 'O'-ring, body        | 1           | P-58-0719 72         | P-58-0719 72         | P-58-0719 72         |
| 8           | 'O'-ring, screw       | 5           | P-58-0717 72         | P-58-0717 72         | P-58-0717 72         |
| 9           | Screw, bracket        | 4           | P-58-0715 10         | P-58-0715 10         | P-58-0715 10         |
| 10          | 'O'-ring, segment     | 1           | P-58-0754 72         | P-58-0754 72         | P-58-0754 72         |
| 11, 13 & 14 | Shaft seal & 'O'-ring | 1           | P-58-0714 12         | P-58-0714 12         | P-58-0714 12         |
| 15          | Impeller              | 1           | P-58-0704 30         | P-58-0706 30         | P-58-0975 30         |
| 16          | Screw, impeller       | 1           | P-58-0716 10         | P-58-0716 10         | P-58-0716 10         |
| 17          | Volute                | 1           | P-58-0702 30         | P-58-0702 30         | P-58-0977 30         |
| 18          | Screw, side volute    | 2           | P-58-0725 10         | P-58-0725 10         | P-58-0725 10         |
| 19          | Screw, top volute     | 1           | P-58-0997 10         | P-58-0771 10         | P-58-0771 10         |
| 20          | Check valve           | 1           | P-58-0705 72         | P-58-0705 72         | P-58-0705 72         |
| 21          | Screw, body           | 10          | P-58-1206 10         | P-58-1206 10         | P-58-1206 10         |
| 22          | 'O'-ring, drain plug  | 1           | P-58-1009 72         | P-58-1009 72         | P-58-1009 72         |
| 23          | Plug, drain           | 1           | P-58-0723 30         | P-58-0723 30         | P-58-0723 30         |
| 24          | Plug, filler          | 1           | P-58-0722 30B        | P-58-0722 30B        | P-58-0722 30B        |
| 25          | 'O'-ring, filler plug | 1           | P-58-0765 72         | P-58-0765 72         | P-58-0765 72         |
| 27          | Key                   | 1           | P-58-0718 30         | P-58-0718 30         | P-58-0718            |
| 30          | Shim                  | As required | P-58-0778 11 (.006") | P-58-0778 11 (.006") | P-58-0778 11 (.006") |
|             |                       | "           | P-58-0778 12 (.015") | P-58-0778 12 (.015") | P-58-0778 12 (.015") |
|             |                       | "           | P-58-0778 13 (.030") | P-58-0778 13 (.030") | P-58-0778 13 (.030") |
| 42          | Body                  | 1           | P-58-1002 30B        | P-58-1002 30B        | P-58-1002 30B        |

**NOTE:** This parts list is intended for EPDM fitted pumps only.